




You will need:



Fitting, Operating & Safety Instructions.


1. During the ordering process, you will have selected either 'inside recess' or 'outside recess' measurements.

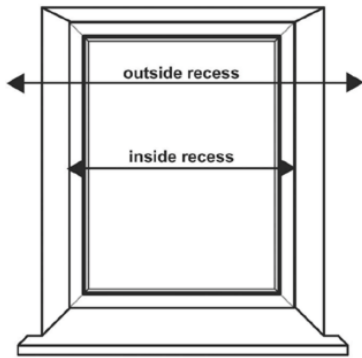


outside recess
follow face fix instructions

inside recess
follow top fix instructions


2. Face Fixing Lightly screw short screws into place. Position brackets approx 5cm from the ends of the headrail. Mark holes **A** and screw brackets into place.



Top Fixing Measure and mark the distance any handles protrude. Then, using the drape hanger, find and mark the fitting position **A**. Drill brackets into position 5cm away from the side walls.




3. Face Fixing With carriage **C** closest to you, hook the back of the headrail into the brackets. Tighten the short screws to lock the headrail into place.

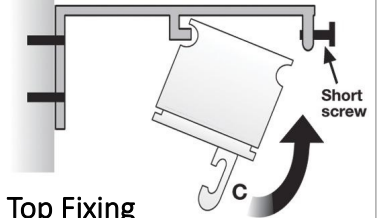


Top Fixing

Tilt and hook the front of the headrail (carriage **C** closest to you) into the bracket. Press the back up into position until it clicks. Push **B** up to release blind.

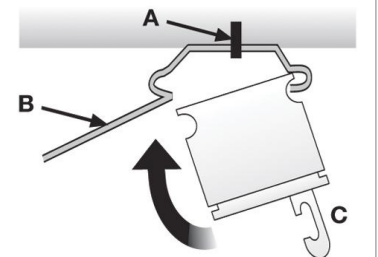


4. Once headrail is fitted, open the plastic protecting the roll of drapes. Top hangers are stitched into the tops, so come as standard.

Peel off one drape at a time and clip the hangers (**A**) on to the carriage, ensuring the fabric overlaps are at the back.

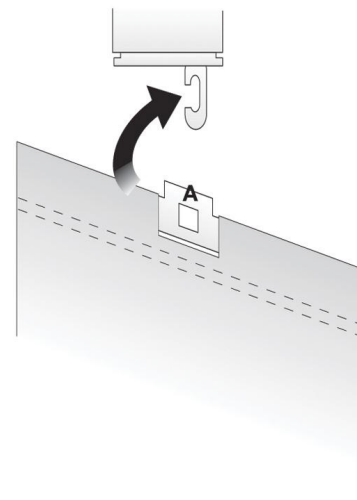


5. Starting from one end, attach the stabilising chain. One clip on the chain to each bottom weight.

Repeat the process for both sides.

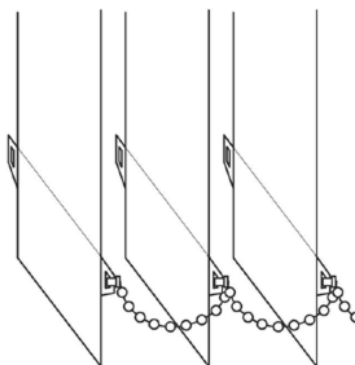

Tip: Lifting the hook on the chain, over & down onto the weight tends to prevent potential damage.

6. Always use the chain safety clip to remove the possibility of loose hanging cords or use a wand.



This tensioning device should be fitted in-line with child safety legislation (please see overleaf).

The...
"distance from floor to bottom of cord shall be at least **1.5m**"

Operating your Blind.

Use pull cord to open and close your blind.
Use the operating chain to rotate the vanes.
Only draw the vanes left or right whilst open.

Need some help fitting your blind?


0191 499 0099

Give us a call,
8am - 5pm Monday - Friday
8am - 4pm Saturday

PLEASE KEEP BABY'S COT OR CHILD'S BED AWAY FROM WINDOWS AND ENSURE THAT ALL BLIND & CURTAIN CORDS ARE KEPT OUT OF REACH.

WARNING

Young children can be strangled by loops in pull cords, chains, tapes and inner cords that operate the product.



To avoid strangulation and entanglement, keep cords out of the reach of young children. Cords may become wrapped around a child's neck. Move beds, cots and furniture away from window covering cords.

Do not tie cords together. Make sure cords do not twist and create a loop.

CHILD SAFETY

Child Safety Devices are fitted to this blind or are supplied as non-integral components. This is required to comply with BS EN 13120.


Please ensure your blind installer explains the requirements to your satisfaction and is able to install all non-integral safety items or if you are fitting this blind yourself, that you understand and are able to do so.

Information about blinds and Child Safety can be found at www.bbsa.org.uk & at www.makeitsafe.org.uk



Children can strangle if this safety device is not installed. Always use this device to keep cords or chains out of reach of children.

This label accompanies a non-integral safety device (cleat) designed to wrap all excess cord around away from a child's reach at a height of 1.5m (approx. 60") from floor level.

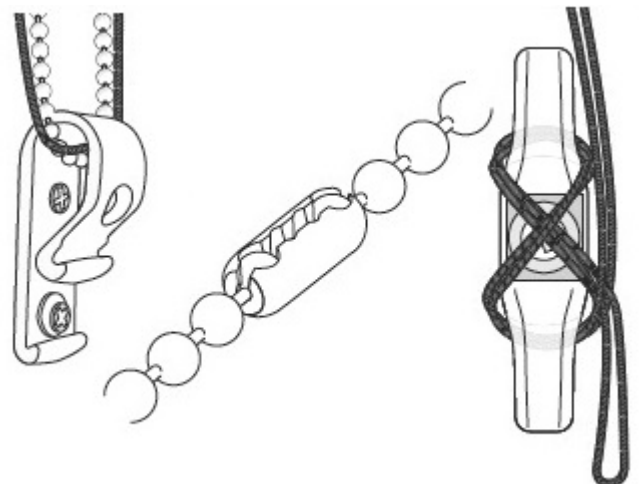

In the interest of safety, please keep all pull cords and chains out of the reach of children. Install safety devices such as cleats and cord tidies, to limit access to cords. Hanging cords can be a potential risk to children, so the greatest care needs to be taken at all times.

Do not tie loose cords and chains together.

Check the condition of all safety devices if not used regularly and replace if the device is faulty.



A1blinds
BLIND MANUFACTURERS

Tel: 0191 499 0099
www.a1blindsuk.co.uk